


CADDY ROD LOCK Nut



- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Fast installation onto long threaded rods – push the nut in place instead of threading it up the rod
- Excellent alignment and easy fine adjustment by spinning the nut
- Extremely useful in tight spaces where wrenches are difficult to use

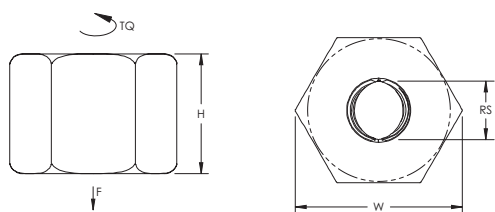

Material: Steel

Finish: Electrogalvanized

| Part Number | Article Number | Rod Size RS | Height H | Width W | Wrench Size | Torque TQ | Static Load F |
|-------------|----------------|-------------|----------|---------|-------------|-----------|---------------|
| CRLNM8EG | 390013 | M8 | 20 mm | 27,3 mm | 24 mm | 6,8 N-m | 4.500 N |
| CRLNM10EG | 390014 | M10 | 20 mm | 27,3 mm | 24 mm | 6,8 N-m | 6.000 N |

Static Load based on Class 4.6 threaded rod.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

