



DESCRIPTION


Grooved concentric reducers provide an economical and efficient method of reducing grooved piping systems.

Sizes available: 1½ x 1¼" - 8 x 6"
Working pressure: 300 PSI / 2068 Kpa

MATERIAL SPECIFICATIONS

- **Housing:**
Ductile iron conform to ASTM A536 65-45-12
- **Coating:**
 - ☐ Galvanized
 - ☐ Red paint coating: RAL 3000

DIMENSIONS

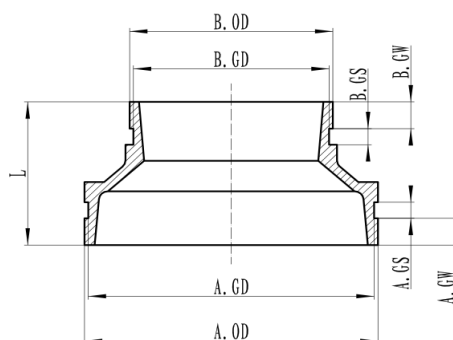

Reference		Size	O.D. (AxB) mm	Nominal Dimensions								Weight	
Red	Galva			DN mm	L mm	A. GD mm	B. GD mm	A. GW mm	B. GW mm	A. GS mm	B. GS mm	Kg	
GRCR	GRCG	1½ - 1¼	48,3 x 42,4	40 - 32	64	45,1	39,0	7,93	7,93	15,88	15,88	0,32	
GRCR	GRCG	2 - 1½	60,3 x 48,3	50 - 40	64	57,2	45,1	7,93	7,93	15,88	15,88	0,41	
GRCR	GRCG	2½ - 1½	76,1 x 48,3	65 - 40	64	72,3	45,1	7,93	7,93	15,88	15,88	0,49	
GRCR	GRCG	2½ - 2	76,1 x 60,3	65 - 50	64	72,3	57,2	7,93	7,93	15,88	15,88	0,51	
GRCR	GRCG	3 - 2	88,9 x 60,3	80 - 50	64	84,9	57,2	7,93	7,93	15,88	15,88	0,59	
GRCR	GRCG	3 - 2½	88,9 x 76,1	80 - 65	64	84,9	72,3	7,93	7,93	15,88	15,88	0,62	
GRCR	GRCG	4 - 2	114,3 x 60,3	100 - 50	76	110,1	57,2	9,53	7,93	15,88	15,88	0,88	
GRCR	GRCG	4 - 2½	114,3 x 76,1	100 - 65	76	110,1	72,3	9,53	7,93	15,88	15,88	0,95	
GRCR	GRCG	4 - 3	114,3 x 88,9	100 - 80	76	110,1	84,9	9,53	7,93	15,88	15,88	1,02	
GRCR	GRCG	5 - 2	139,7 x 60,3	125 - 50	85	135,5	57,2	9,53	7,93	15,88	15,88	1,60	
GRCR	GRCG	5 - 2½	139,7 x 76,1	125 - 65	85	135,5	72,3	9,53	7,93	15,88	15,88	1,65	
GRCR	GRCG	5 - 3	139,7 x 88,9	125 - 80	85	135,5	84,9	9,53	7,93	15,88	15,88	1,65	
GRCR	GRCG	5 - 4	139,7 x 114,3	125 - 100	85	135,5	110,1	9,53	7,93	15,88	15,88	1,80	
GRCR	GRCG	6 - 3	168,3 x 88,9	150 - 80	85	164,4	84,9	9,53	7,93	15,88	15,88	2,04	
GRCR	GRCG	6 - 4	168,3 x 114,3	150 - 100	85	164,4	110,1	9,53	9,53	15,88	15,88	2,23	
GRCR	GRCG	6 - 5	168,3 x 139,7	150 - 125	85	164,4	135,5	9,53	9,53	15,88	15,88	2,29	
GRCG	GRCG	8 - 6	219,1 x 168,3	200 - 150	85	214,4	164,4	11,10	9,53	19,05	15,88	3,34	