



DESCRIPTION


Grooved equal tees provide an economical and efficient method of changing direction and adding an outlet in piping systems.

Sizes available: 1" - 10"
Working pressure: 300 PSI / 2068 Kpa

MATERIAL SPECIFICATIONS

- **Housing:**
Ductile iron conform to ASTM A536 65-45-12
- **Coating:**
 - ☐ Galvanized
 - ☐ Red paint coating: RAL 3000

DIMENSIONS

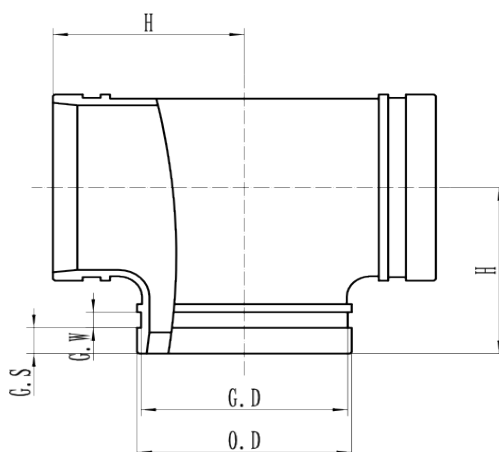

Reference		Size	O.D.	Nominal Dimensions					Weight
Red	Galva			DN mm	H mm	G.D mm	G.S mm	G.W mm	
GTR	GTG	1	33,7	25	57	30,2	15,88	7,93	0,50
GTR	GTG	1¼	42,4	32	70	39,0	15,88	7,93	0,64
GTR	GTG	1½	48,3	40	70	45,1	15,88	7,93	0,73
GTR	GTG	2	60,3	50	70	57,2	15,88	7,93	0,89
GTR	GTG	2½	76,1	65	76	72,3	15,88	7,93	1,43
GTR	GTG	3	88,9	80	85	84,9	15,88	7,93	1,68
GTR	GTG	4	114,3	100	102	110,1	15,88	9,53	2,29
GTR	GTG	5	139,7	125	121	135,5	15,88	9,53	4,46
GTR	GTG	6	168,3	150	140	164,4	15,88	9,53	6,50
GTR	GTG	8	219,1	200	175	214,4	19,05	11,1	12,50
GTR	GTG	10	273,0	250	215	268,3	19,05	12,7	18,30