

Other Pump Equipment, Foot Valves



Body: Cast Iron [epoxy blue] internal/external
Körper: Sphäroguß [epoxy blau] innen/ausßen
Corps: Fonte maleable [epoxy bleu] intérieur/extérieur


Spring: Stainless Steel
Feder: Edelstahl
Ressort: Inox

Strainer: Galvanised Steel
Saugkorb: Galvanisiertes Stahl
Filtre: Acier galvanisé


Seal: NBR
Dichtung: NBR
Joint: NBR

MODEL 24

DN100-DN250

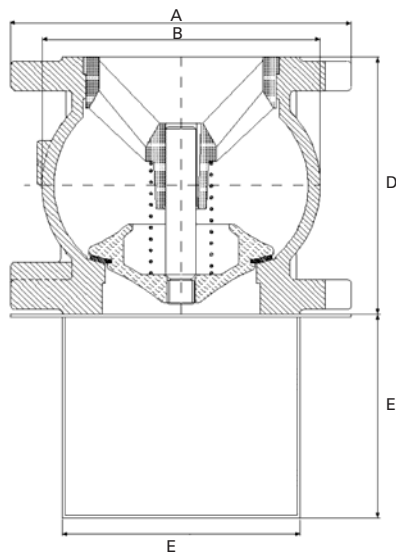

DN300

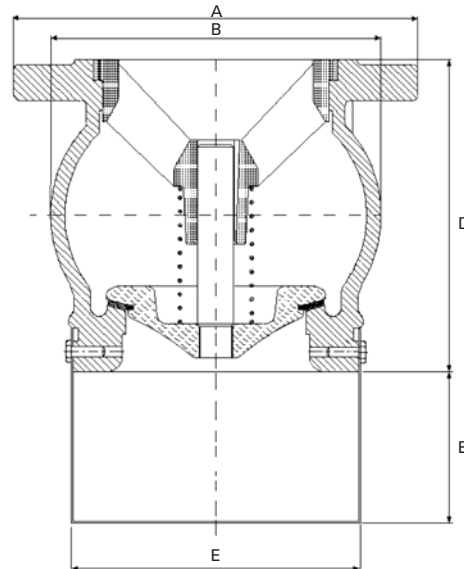

Model 24 Flanged with Basket/Flanschausführung mit Saugkorb/bride avec panier

Art. Nr.	DN	PN [Bar]	Drilling Bohrung Perçage	A mm	B mm	C mm	D mm	E mm	Kv m³/h	Ⓚg
24100B1148	100 4"	16	PN10/16	220	185	164	220	142	360	16.0
24100B1688	150 6"	16	PN10/16	285	248	212	285	200	810	32.7
24100B2198	200 8"	16	PN16	340	345	255	340	300	1080	52.0
24100B2738	250 10"	16	PN16	405	415	330	405	380	1770	86.0

Model 302 Flanged with Basket/Flanschausführung mit Saugkorb/bride avec panier

Art. Nr.	DN	PN [Bar]	Drilling Bohrung Perçage	A mm	B mm	C mm	D mm	E mm	Kv m³/h	Ⓚg
30203247	300 12"	10	PN10	486	482	426	410	242	2210	133.0